

Quick start guide

5.8 GHz Cordless
Telephone/Answering
System E6012B/
E6013B/E6014B/
E3813B

with caller ID/call waiting






Installation and setup

Choose a central location close to a telephone jack and a power outlet not connected to a wall switch. The telephone base can be placed on a flat surface or mounted on a standard wall plate. For optimum range and better reception, place the telephone base in a high and open location.

Avoid placing the telephone base too close to:

- Communication devices such as: personal computers, computer routers, television sets, VCRs, wireless routers (wireless broadband, wi-fi, or 802.11) or other cordless telephones.
- Excessive heat sources.
- Noise sources such as a window with traffic outside, motors, microwave ovens, refrigerators, or fluorescent lighting.
- Excessive dust sources such as a workshop or garage.
- Excessive moisture.
- Extremely low temperatures.
- Mechanical vibration or shock such as on top of the washing machine or work bench.

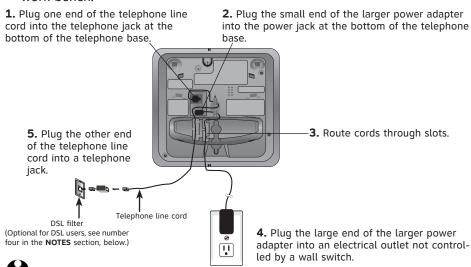

UNOTES:

- 1. Use only the power cord supplied with this product, if you need a replacement, call 1 (800) 222-3111, in Canada dial 1 (866) 288-4268. Or visit our website at www.telephones.att.com.
- 2. Be sure to use an electrical outlet not controlled by a wall switch.
- This power adapter is intended to be plugged into a vertical wall outlet or a floor outlet. The prongs are not designed to hold the plug in place if it is plugged into a ceiling, under-thetable or cabinet outlet.
- 4. If you receive high speed internet through your telephone line (coming referred to as DSL), and you are experiencing inference during telephone conversations and/or your caller ID features are not functioning properly, install a DSL filter to the telephone line between the telephone base and the telephone wall jack. Contact your DSL service provider for a DSL filter.

Installation and setup

After battery installation, the battery may have enough charge to allow some calls. For best performance, place the handsets in the telephone base or the charger and allow to charge for 16 hours before use.

You can keep the battery charged by returning the handsets to the telephone base or the charger after use. When the battery is fully depleted, a recharge takes about 12 hours. The average talk time on a fully charged battery is about eight hours, and the standby time is approximately five days. Actual battery life depends on usage conditions and age of battery.



1. Plug the battery securely into the plug inside the handset battery compartment, matching the color-coded label.




2. Place the battery and wires neatly inside the compartment.

4. The battery may have



3. Slide battery compartment cover towards the center until it clicks into place.





To replace the battery, press in and push outward on the tab to open the battery compartment cover. Lift out the old battery and disconnect it from the compartment. Follow the instructions on this page to install and charge the new battery.

Caution: Use only the supplied rechargeable battery or replacement battery (model 27910, part number 89-0099-00-00) or equivalent. To order a replacement battery, visit our website at www.telephones.att.com or call 1 (800) 222-3111. In Canada, call 1 (866) 288-4268.

Quick reference quide

Handset

CID

Press to display caller ID information.

\PHONE/FLASH

Press to make or answer a call. During a call, press to receive an incoming call if call waiting is activated.


MUTE/DELETE

While on a call, press to mute microphone. While reviewing the call log, press to delete an individual entry, or press and hold to clear the caller ID log. While predialing, press to delete digits from a string.

■ SPEAKER

Press to activate handset speakerphone. Press again to resume normal handset use.





MENU/SELECT

Press to display the menu. Once in a menu, press to select an item or save an entry or setting. Press or to scroll up or down while in menus. While entering names or numbers, press (C) or to move the cursor.

DIR

Press to display directory entries.

€OFF/CLEAR

Press to cancel an operation, back up to the previous menu, or exit the menu display.

REDIAL/PAUSE

Press to view redial memory. While entering numbers, press and hold to insert a dialing pause.

INT

Press to initiate an intercom conversation or transfer a call

Feature menu



Feature menu

DIRECTORY

CALL LOG

SETTINGS

SOUNDS

DISPLAY

RINGER VOLUME

Using menus

Press to scroll through menu items.

Press MENU/SELECT to select or modify a highlighted item.

Press FOFF/clear to cancel an operation, back up to the previous menu, or exit the menu display

NOTE: For more information. please refer to the user's manual.

Quick reference guide

Telephone base

CHARGE/IN USE

- Flashes when another telephone on the same line and on steady when one of the handsets is in use.
- On steady when the answering system is answering an incoming call.
- Flashes while an incoming call is ringing.
- On steady when the handset is properly positioned to charge in the telephone base.




VOICEMAIL

Flashes when you have new voice mail (requires voice mail service from your local telephone company.

HANDSET LOCATOR

Press to make handsets beep.

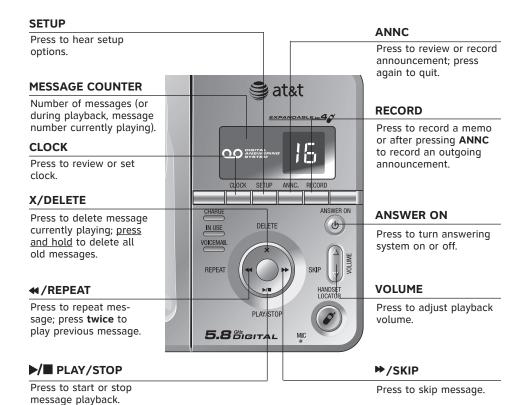



NOTE: For more information, please refer to the user's manual.



www.telephones.att.com